

*The partnership to bring solutions above the limits !*

# SCR Power Controllers

Innovative and Reliable range of  
THYRISTOR POWER REGULATORS (TPR)

[www.celduc-relais.com](http://www.celduc-relais.com)



- Ultra compact footprint
- Up to 690Vac
- Current range : 8-400Amps @ 50°C
- Analog or digital control
- Fieldbus Interface(EtherCAT, Modbus TCP, Modbus RTU, PROFINET, Ethernet/IP)
- Easy USB setup
- DIN Rail / Panel mount / External mount / Liquid cooled
- Touchsafe with global certifications



SINGLE PHASE SCR POWER CONTROLLERS



THREE PHASE SCR POWER CONTROLLERS



DIGITAL INTERFACES  
& ACCESSORIES



Dear customers, dear readers,

January 2017,

**celduc® relais** is now considered as a worldwide specialist in the design and manufacturing of Solid State Relays (SSR).

In order to expand our high-end SSR range with power control solutions up to 400A, we are today very proud to announce an exclusive distribution agreement with USA based company Control Concept, Inc.

The agreement addresses Europe, Africa, Pacific, Middle and Far East except India, Iran and North Korea.

Control Concept, Inc., founded in 1980 and located in Chanhassen, MN, is a privately-held company and the market leader in the design and manufacture of stock and custom thyristor power controllers (sometimes called SCR, TPR or APR) from 8 to 400Amps, 24 to 690Vac, single, dual and 3 phase switching versions. The product lines include accessories for measurements, cooling and fieldbus connections.

MicroFusion, the latest generation of SCR power controllers up to 400Amps, concentrates all the know-how of Control Concept, Inc. and offers the greatest performances in the most compact design available on the market.

With our worldwide sales network and our efficient technical team, celduc® relais now offers Control Concept, Inc.'s products with local sales and support.


Do not hesitate to visit our website or to contact us to get more information.

Your celduc's team




## SSR range

Up to 690Vac - 125A  
Up to 1700Vdc - 150A




Interface relays




PCB relays




Single phase  
Solid State Relays



Two phase  
Solid State Relays



Three phase  
Solid State Relays



Solid State Relays  
for motor control




Phase angle  
controllers



DC Solid  
State Relays



Catalogues and leaflets  
available on request

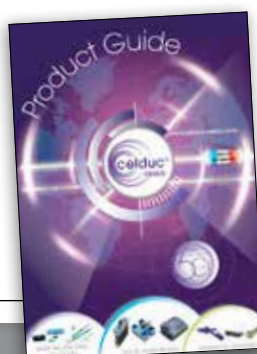



# SCR Power Controllers range



## Contents



### **MicroFusion single phase** ..... **Pages 2 to 10**

MicroFUSION is an ultra-compact high performance digital SCR controller that adapts to the analog environment as well as the digital environment.



### **MicroFusion three phase** ..... **Pages 11 to 21**

MicroFUSION high-performance microprocessor-based power controller is also available in three phase models to control AC loads.



### **Multizone MicroFusion**..... **Pages 22 to 29**

MicroFUSION power controllers are also available in multizone system (external panel mount, liquid cooled) with up to 10 MicorFusion units.



### **External Digital Interface : Connect Module** ..... **Pages 30 to 31**

Connect Module is an External Interface for controlling up to 10 zones, data logging and fieldbus interfaces (several available).



### **Accessories** ..... **Pages 32 to 33**

Various accessories such as Remote hand terminal, remote display, USB cables, Din Rail power supplies, .... are available.

## Typical applications :

- Semiconductor Processing Equipment
- Crystal & Solar Manufacturing
- Electric furnaces
- Resistance heating
- Glass industry processing equipment



# MICROFUSION

## SINGLE PHASE SCR POWER CONTROLLERS

### FEATURES

#### Auto-Ranging Input Voltage

UL: 24 - 600 Vac, 45 - 65 Hz,  
CE: 24 - 690 Vac, 45 - 65 Hz

#### AC Output

8, 16, 32, 50, 80, 100, 130, 160, 200, 240, 320, 400 Amps  
(@ 50°C 1829m, 122°F 6000 ft.)

#### Control Features

Microprocessor-based controller, phase lock loop timing  
Firing modes: Zero Cross, Phase Angle, and  
Zero Cross Transformer (ZCT) Mode  
Feedback: voltage, current, true power, external  
Adjustable soft start for phase angle control  
Output limits: voltage, current, power  
Missing cycle detection  
Use SYNC-GUARD™ to power level multiple Zero-Cross  
controllers  
Prevent upstream transformer heating with TRANS-GUARD™  
Dedicated input bit for Run/Stop  
kWh meter, Resistance Measurement  
Partial Load Failure Detection (option)  
Heater Bakeout

#### Analog Interface (Up to Two Analog Inputs)

Standard setpoint ranges: 0 - 5 Vdc, 4 - 20 mA  
Field scalable 0 - 10 Vdc, 0 - 20 mA, or potentiometer

#### Available Fieldbus Interfaces

EtherNet/IP	EtherCat
PROFINET	Modbus RTU (RS-485)
PROFIBUS	Modbus TCP (Ethernet)

#### Easy Setup via Plug-n-Play USB

Load / Save configurations  
Diagnostics with chart and log operations

#### Two Year Warranty



### OPTIONS

#### General Purpose Input

#### Second Analog Input Channel

Second setpoint, potentiometer input, external feedback,  
or Pulse Width Modulation (PWM)

#### Alarm Relay

Form C relay output

#### 2 x 16 Bit Analog Retransmits

Standard setpoint ranges: 0 - 5 Vdc, 4 - 20 mA  
Field scalable 0 - 10 Vdc, 0 - 20 mA, or potentiometer

#### Current Limit, Power Limit, Voltage Limit

#### Remote Display

2 line, 16 character text display with 5 buttons

#### High Performance

True RMS power, load voltage feedback, load current  
feedback, high resolution control loop. Increased accuracy  
and linearity.

#### Isolated I/O

500 Vac isolation from 24 Vdc control power to  
Analog Inputs. General purpose input, Run/Stop, and  
Retransmits.

#### External, Touchsafe Class T Fusing

### DESCRIPTION

MicroFUSION is an ultra-compact high-performance microprocessor-based power controller, available in single phase, three phase 4 SCR, or three phase 6 SCR models to control AC loads.

Resistive or transformer-connected loads can be controlled in either Phase Angle, Zero Cross, or Zero Cross Transformer (ZCT) Mode. Output is controlled linearly with respect to command signal and can be set to the average or RMS value of the voltage and current, as well as true instantaneous power or external feedback.

MicroFUSION Series power controllers are available in current ratings from 8 - 400 Amps AC. Auto-ranging voltage circuitry enables main supply voltage from 24 - 600 Vac for UL/cUL or 24 - 690 Vac for CE, (45 - 65 Hz) eliminating the need for hardware jumpers or stocking multiple controllers for international voltages. A separate 24 Vdc power source supplies the control electronics and maintains critical communications to your control system when the mains are absent.

## DESCRIPTION, CONTINUED

Status LEDs and a LED bar graph make operation and troubleshooting simple. A plug-n-play USB interface and free Control Panel software for your PC further simplifies installing and configuring the controller to your application. For example, controller settings can be duplicated by simply loading a configuration file saved from a previous unit.

Setpoints can be controlled through the standard analog or optional digital fieldbus interface. The factory-configured analog setpoint signal ranges are 0 - 5 Vdc and 4 - 20 mA, both of which are field scalable from 0 - 10 Vdc or 0 - 20 mA.


The fieldbus interface options include EtherNet/IP, EtherCAT, PROFINET, PROFIBUS, Modbus RTU (RS-485), or Modbus TCP. These can be used to communicate with a PLC or factory control system. PROFINET, Modbus TCP, and EtherNet/IP are also available as internal fieldbus options. All interfaces are also available through an external module. A single external Connect Module can also control up to ten zones, reducing system installation costs.

The robust design of MicroFUSION allows for continuous full-frame current operation, without derating, up to 122°F / 6000 ft [50°C / 1829m] altitude. Cooling is accomplished through natural convection, forced air, optional external panel mount, or optional liquid-cooled chill plate.


The optional IP65 Remote Display provides a clear readout of key parameters and alarm status. Setpoints, limits and alarms are touchpad accessible and easily customized. For additional convenience, a panel mounting kit is available, eliminating the need for external meters, indicators, switches and the associated costs of wiring and labor.

## DIMENSIONS

Dimensions in Inches [mm]. MicroFUSION can be DIN rail mounted (up to 80 A) or panel mounted.

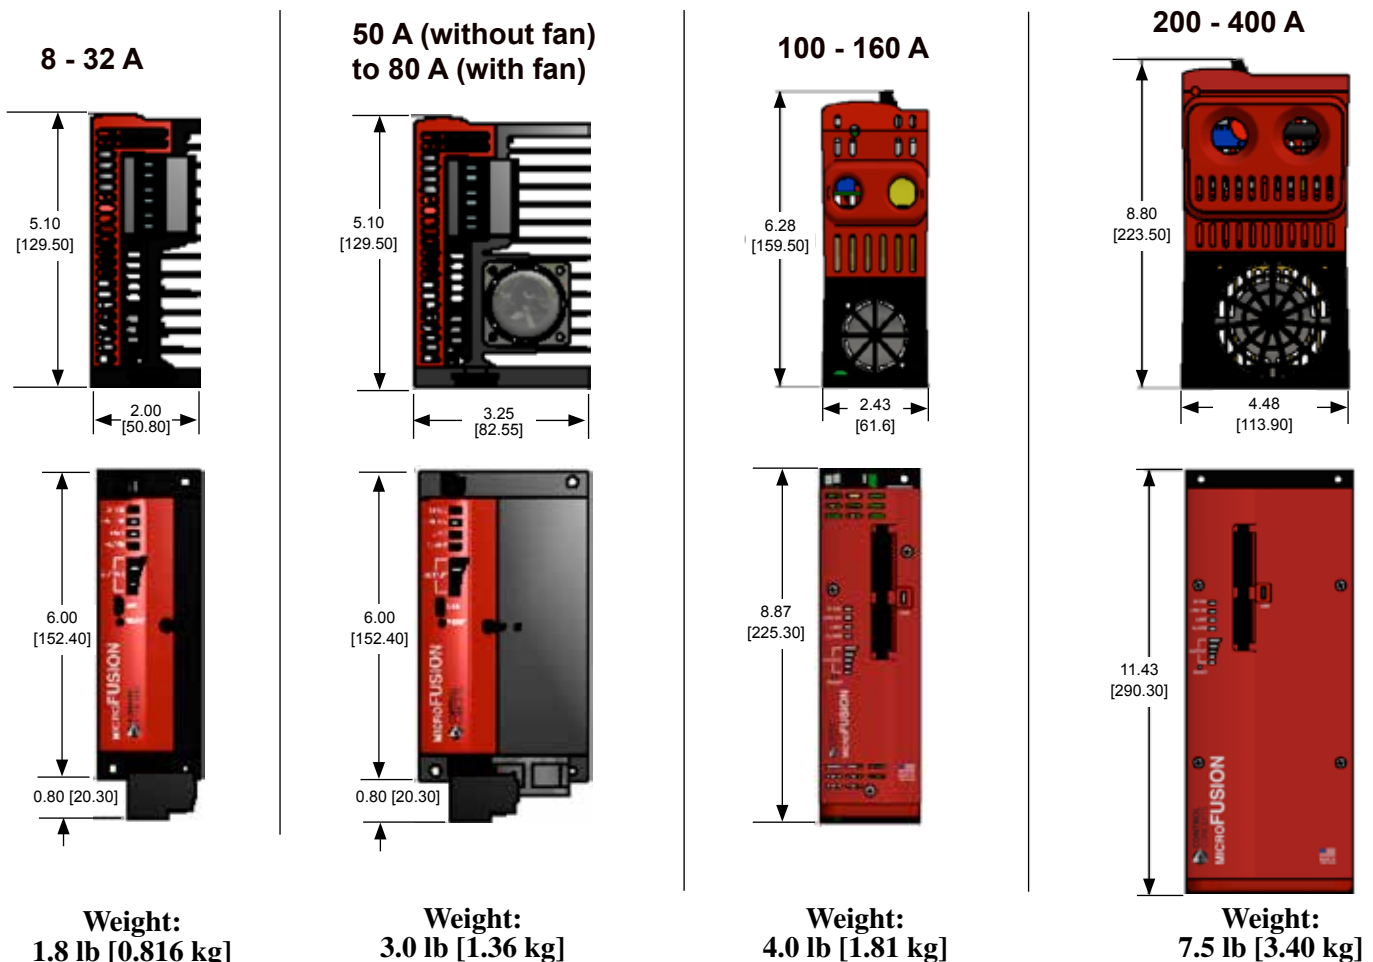


## P1/P2 CONNECTOR

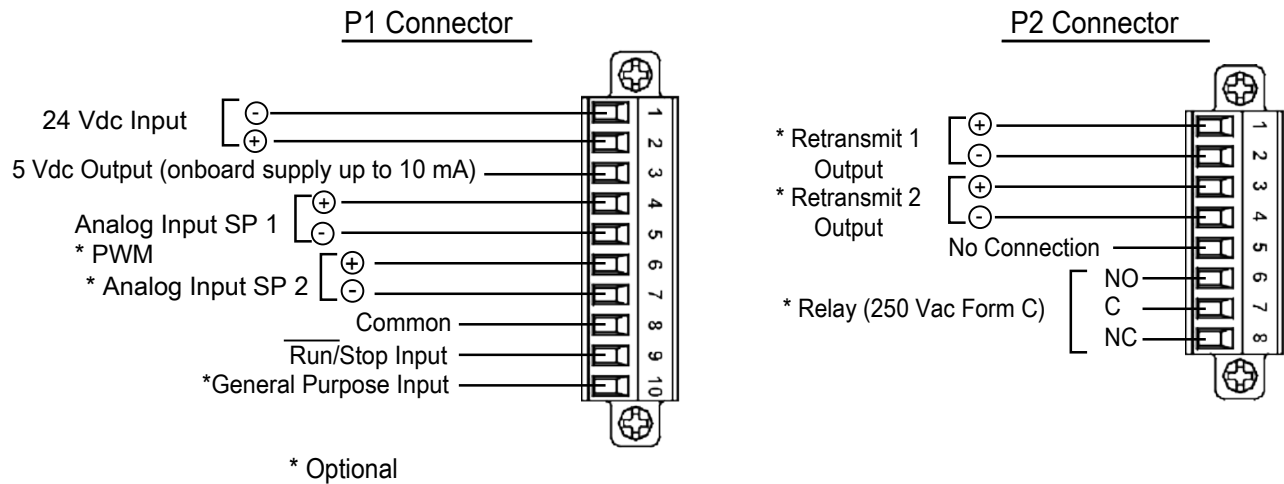

## SINGLE PHASE LINE/LOAD CONNECTIONS

### SINGLE PHASE 8 - 80 AMP

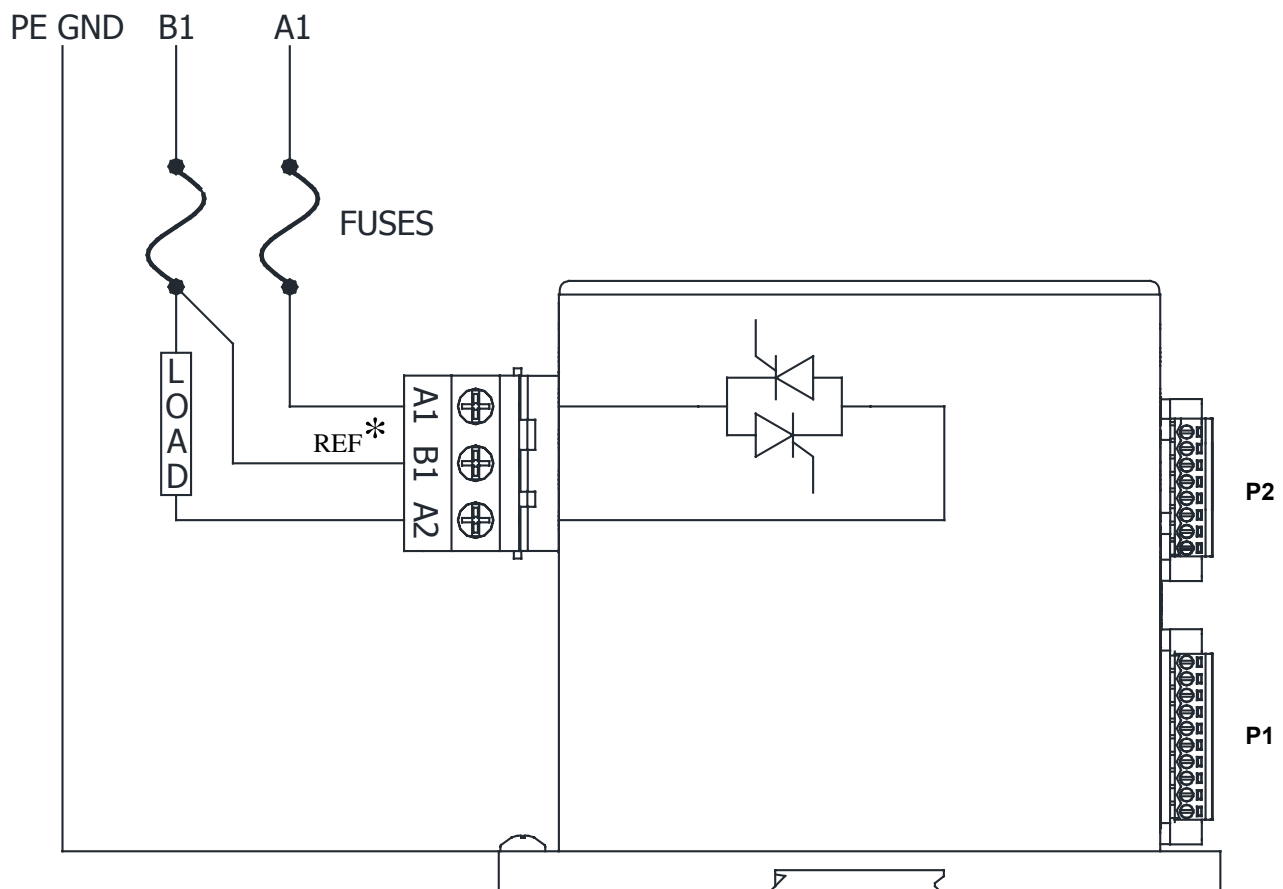


See manual for recommended wire sizes.


\*Note: 0.60 mA maximum through B1 connection at 600 Vac

# SINGLE PHASE LINE/LOAD CONNECTIONS, CONTINUED

## SINGLE PHASE 100 - 160 AMP

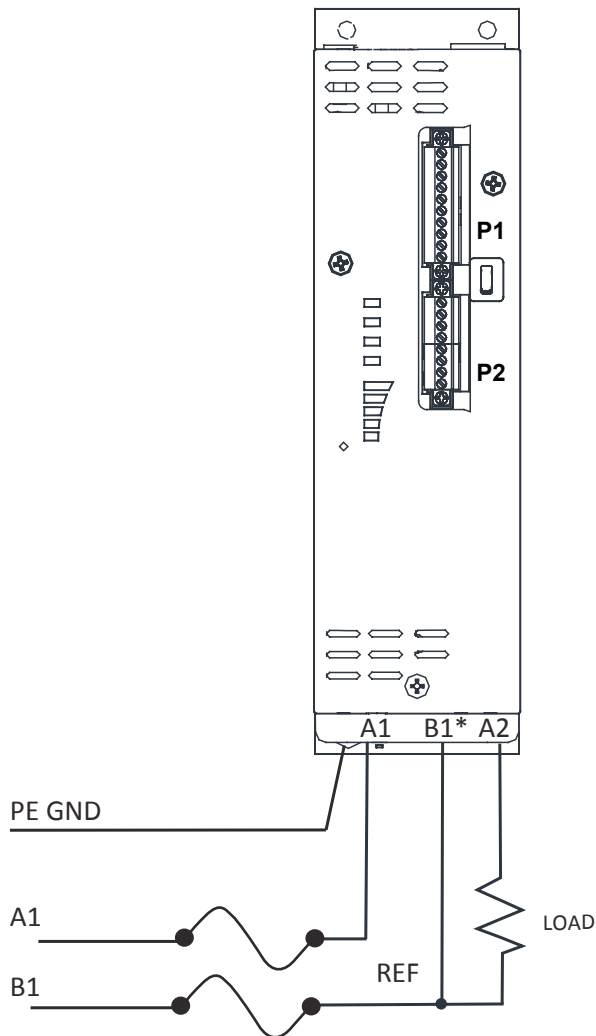

## SINGLE PHASE 200 - 400 AMP

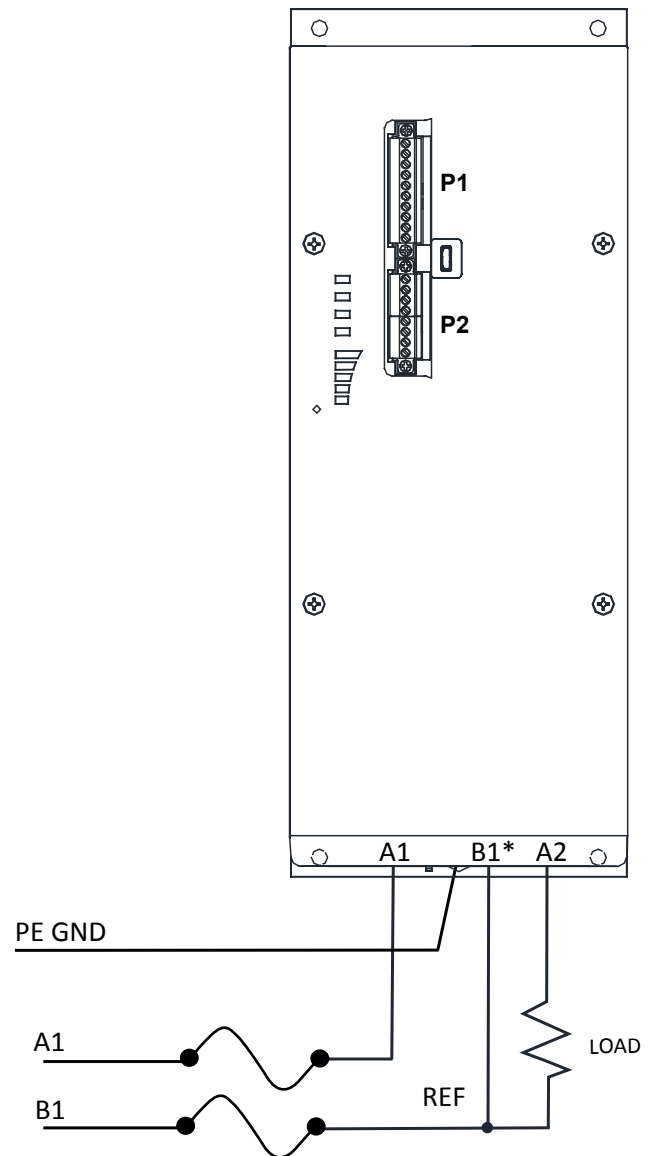

See manual for recommended wire sizes.

\*Note: 0.60 mA maximum through B1 connection at 600 Vac

## FEATURE COMPARISON

MicroFUSION is available with one of four performance options: SX-S (Standard board), SX-L (Standard board with Current features), HX-L (High Performance board with Current and Voltage features) and HX-P (Fully populated High Performance board)

● = Included

□ = Option Available at Manufacturing Time

○ = Field Upgradable Option

- = Not available

FEATURE LIST	SX-S	SX-L	HX-L	HX-P
Auto-Ranging Input: 24 - 600 Vac for UL/cUL, 690 Vac for CE	●	●	●	●
Phase Angle and Zero Cross Firing Modes	●	●	●	●
Adjustable Phase Angle Soft-Start	●	●	●	●
Heater Bake Out	●	●	●	●
Touchsafe Design	●	●	●	●
UL Listed, CE, 100kA SCCR, and RoHS certifications	●	●	●	●
Micro USB Connection (USB Plug-N-Play)	●	●	●	●
Free Control Panel Software	●	●	●	●
DIN Rail Mountable (Up to 80A)	●	●	●	●
Panel Mount	●	●	●	●
Run/Stop	●	●	●	●
Overcurrent Trip	●	●	●	●
Analog Input (0 - 10 Vdc, 0/4 - 20 mA or potentiometer)	●	●	●	●
CCI Link™ Connectivity	●	●	●	●
TRANS-GUARD™ - Prevent upstream transformer heating	●	●	●	●
LED Bar Graph	●	●	●	●
Fixed Current Limit - 105% of Frame	●	-	-	-
Adjustable Current Limit	○	●	●	●
Alarm Relay	○	○	●	●
Current Control	○	●	●	●
Load Voltage Control	-	-	●	●
Voltage Limit	-	-	●	●
Monitor Load Current - Provides load current data via software, display, or fieldbus	○	●	●	●
Isolated I/O	□	□	□	□
2 Analog Input Channel (0 - 10 Vdc, 0/4 - 20 mA or potentiometer)	○	○	○	○
General Purpose Input	○	○	○	○
Pulse Width Modulation Input (PWM)	○	○	○	○
Accessory Option: Remote Display	○	○	○	○
SYNC-GUARD™ Connectivity - Power level multiple Zero-Cross controllers	○	○	○	○
External Fieldbus Options: Modbus TCP, Modbus RTU, EtherNet/IP, PROFINET, PROFIBUS, EtherCat	○	○	○	○
Internal Fieldbus Options: PROFINET, Modbus TCP, and EtherNet/IP	□	□	□	□
External Panel Mount Heatsink (Up to 50 A)	□	□	□	□

FEATURE COMPARISON LIST, continues on next page



## FEATURE COMPARISON, CONTINUED

FEATURE LIST, CONTINUED	SX-S	SX-L	HX-L	HX-P
Water Cooled Heatsink	□	□	□	□
Zero Cross Transformer Firing Mode	-	-	○	○
Retransmit (RTX): 2x High Resolution Analog Outputs 0 -10 Vdc or 0/4-20 mA	-	-	○	○
Power Limit	-	-	○	●
True Power Control	-	-	○	●
Monitor True RMS Power - Provides true power data via software, display, or fieldbus	-	-	○	●
High Resolution Control Loop	-	-	○	●
Kwh Meter	-	-	○	●
HiPer Mode - High performance low conduction angle firing mode	-	-	○	●
Resistance Measurement	-	-	○	●

## SPECIFICATIONS

POWER	
Line Voltage (Auto Ranging)	UL/cUL: 24 - 600 Vac (Nominal) +10% / -15% (Contact CCI for other options) CE: 24 - 690 Vac (Nominal) +10% / -15% (Contact CCI for other options)
Line Frequency (Auto Ranging)	45 - 65 Hz
Frame Current Ratings (Amps)	Continuous RMS (AC) 8   16   32   50   80   100   130   160   200   240   320   400
Current Rating - Peak Surge	20X frame rating for 10 ms
Minimum Hold/Latch Current	500 mA up to 160 A      1 A at 200 - 400 A
Max Leakage Current	10.6 mA @ 600 VAC 50/60 Hz
SCR Rating (PIV)	1600 V peak forward & reverse
Fusing	Optional external Class T, branch-rated, touch-safe fusing
Thermal	Integrated heat sink thermal sensor
Current Limit	105% (SX-S), 20 - 105% (SX-L, HX) of continuous rating of Frame Amp Rating
Current Trip	50 - 450% of continuous rating
Power Dissipation	1.3 Watt per A of load current per phase
Control Power / Operates Internal Control Electronics	24 Vdc +10 / -15% (See Page 8 for DC power consumption)
Utilization Categories	See manual for ratings

ENVIRONMENTAL	
Surrounding Air Operating Temp	32°F to 122°F [0°C to 50°C] with derating for 140°F [60°C]
Humidity	20 to 90% RH Non-Condensing
Rated Operating Altitude	Up to 6000 ft [1829 m] at full rated current
Contaminates	RoHS Compliant, CE Pollution Degree 2
Storage Temperature	- 4°F to 176°F [-20°C to 80°C]

**NOTE:** Refer to the Operators Manual for EMC and other pertinent information.


## SPECIFICATIONS, CONTINUED

### RELIABILITY

Mean Time Between Failure (MTBF) | 100,000 Hours at 25°C

### TEMPERATURE DERATING

Surrounding Air Temperature effect on the Controller

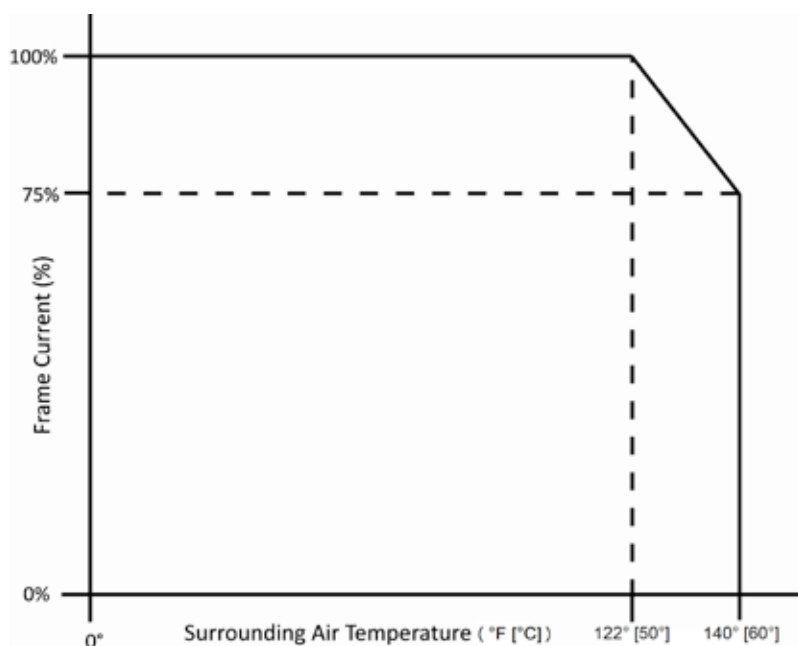

### PERFORMANCE

	Standard	High Performance Option
Setpoint Resolution	10k	10k or 64k
Internal Control Loop Resolution	16k	64k
Output Resolution	12k @ 50Hz, 10k @ 60Hz	50k @ 50Hz, 42k @ 60Hz
Response Time	Adjustable from 50 msec to 2 sec	Adjustable from 50 msec to 2 sec
Accuracy (Full Conduction)		
Voltage	3% of frame rating	0.5% of frame rating
Current	3% of frame rating	0.5% of frame rating
Power	6% of frame rating	1% of frame rating
Output Linearity	4% from 5 to 100% output range	1% from 5 to 100% output range
Accuracy	+10% to -15% line voltage change will result in a max output change of 0.5% from 5 to 100% output range	+10% to -15% line voltage change will result in a max output change of 0.05% from 5 to 100% output range
Temperature Drift	Output shall not change greater than 0.5% per degree C max over the operating temperature range from 5 to 100% output range	Output shall not change greater than 0.2% per degree C max over the operating temperature range from 5 to 100% output range

## SPECIFICATIONS, CONTINUED

### COOLING

Din Rail/Panel Mount	Forced Air / Natural Convection												
External Panel Mount	Natural Convection												
Liquid Cooled	<p>Flow rate: 1 GPM [3.79 LPM] minimum  Maximum inlet temperature: 122° F [50° C]  Maximum pressure: 60 PSI [4.137 Bar]  Up to 50% glycol water solution  Pressure Drop: 2.60 PSI at 1 GPM  Particulate filtered water containing less than:</p> <table> <tr> <th>Mineral</th><th>Recommended Limit</th></tr> <tr> <td>Calcium</td><td>&lt; 50 PPM</td></tr> <tr> <td>Magnesium</td><td>&lt; 50 PPM</td></tr> <tr> <td>Total Hardness</td><td>&lt; 100 PPM (5 Grains)</td></tr> <tr> <td>Chloride</td><td>&lt; 25 PPM</td></tr> <tr> <td>Sulfate</td><td>&lt; 25 PPM</td></tr> </table> <p>A corrosive inhibitor must be used for deionized or demineralized water  PH must be between 4 and 9.</p>	Mineral	Recommended Limit	Calcium	< 50 PPM	Magnesium	< 50 PPM	Total Hardness	< 100 PPM (5 Grains)	Chloride	< 25 PPM	Sulfate	< 25 PPM
Mineral	Recommended Limit												
Calcium	< 50 PPM												
Magnesium	< 50 PPM												
Total Hardness	< 100 PPM (5 Grains)												
Chloride	< 25 PPM												
Sulfate	< 25 PPM												

### DC POWER CONSUMPTION

8 - 50 Amp Single Phase	7 Watts
80 Amp Single Phase	9 Watts
100 - 160 Amp Single Phase	7 Watts
200 - 240 Amp Single Phase	11 Watts
320 - 400 Amp Single Phase	17 Watts
Onboard Fieldbus Module	Add 0.7 Watts
CCI Connect Module	Add 6 Watts for each Connect Module in the system, not per controller

### ENCLOSURE PROTECTIVE RATING

International	IP 20
Remote Display	IP 65, UL Type 1 & 12
External Panel Mount	IP 65, UL Type 4
Liquid Cooled	IP 65, UL Type 4

### I<sup>2</sup>t DATA (8.3 - 10 msec)

Frame Size	Conditions	I <sup>2</sup> t Data
0 - 80	Junction Temp 125°C	16200 A <sup>2</sup> s
100 - 160	Junction Temp 125°C	80000 A <sup>2</sup> s
200 - 240	Junction Temp 125°C	125000 A <sup>2</sup> s
320 - 400	Junction Temp 125°C	320000 A <sup>2</sup> s

### ISOLATION

Signal to Line/Load	4000 Vac minimum
Line/Load to Ground	2500 Vac minimum
Signal to Ground	2000 Vac minimum
Line to Load	1400 Vac minimum
Network	1500 Vac minimum
USB	2500 Vac minimum
Signal to Processor	1500 Vac minimum
Remote Display	2500 Vac minimum

### SCCR - TYPE 1 COORDINATION

Frame 1Ø / 3Ø	Required Fusing *	SCCR Rating
8 Amp	10A Fast Acting J or T	100 kA
16 Amp	20A Fast Acting J or T	100 kA
32 Amp	40A Fast Acting J or T	100 kA
50 Amp	60A Fast Acting J or T	100 kA
80 Amp	100A Fast Acting J or T	100 kA
100 Amp	125A Fast Acting J or T	100 kA
130 Amp	175A Fast Acting J or T	100 kA
160 Amp	200A Fast Acting J or T	100 kA
200 Amp	250A Fast Acting J or T	100 kA
240 Amp	300A Fast Acting J or T	100 kA
320 Amp	400A Fast Acting J or T	100 kA
400 Amp	500A Fast Acting J or T	100 kA

\* Maximum fuse Ampere shown above, fuses with lower Ampere rating can also be used.

### ANALOG SETPOINT INPUTS

Voltage	0 - 10 Vdc 0 to 65535	Update period: 6 ms
Voltage Impedance	200 kOhm	
Max Voltage	+/- 15 Vdc	
Current Mode	0 - 20 mA 0 to 32767	
Current Impedance	249 Ohm	
Max Current	+/- 31 mA or +/- 7.8 Vdc	
Pulse Width-Modulation	0 - 100% Frequency range: 20 Hz to 2 kHz max	

uF1 - - -

## MicroFusion single phase



# MICROFUSION

## THREE PHASE SCR POWER CONTROLLERS

### FEATURES

#### Auto-Ranging Input Voltage

UL: 24 - 600 Vac, 45 - 65 Hz,  
CE: 24 - 690 Vac, 45 - 65 Hz

#### AC Output

8, 16, 32, 50, 80, 100, 130, 160, 200, 240, 320, 400 Amps  
(@ 50°C 1829m, 122°F 6000 ft.)

#### Control Features

Microprocessor-based controller, phase lock loop timing  
Firing modes: Zero Cross, Phase Angle, and  
Zero Cross Transformer (ZCT) Mode  
Feedback: voltage, current, true power, external  
Adjustable soft start for phase angle control  
Output limits: voltage, current, power  
Missing cycle detection  
Use SYNC-GUARD™ to power level multiple Zero-Cross  
controllers  
Prevent upstream transformer heating with TRANS-GUARD™  
Dedicated input bit for Run/Stop  
kWh meter, Resistance Measurement  
Partial Load Failure Detection (option)  
Heater Bakeout

#### Analog Interface (Up to Two Analog Inputs)

Standard setpoint ranges: 0 - 5 Vdc, 4 - 20 mA  
Field scalable 0 - 10 Vdc, 0 - 20 mA, or potentiometer

#### Available Fieldbus Interfaces

EtherNet/IP	EtherCat
PROFINET	Modbus RTU (RS-485)
PROFIBUS	Modbus TCP (Ethernet)

#### Easy Setup via Plug-n-Play USB

Load / Save configurations  
Diagnostics with chart and log operations

#### Two Year Warranty



### OPTIONS

#### General Purpose Input

#### Second Analog Input Channel

Second setpoint, potentiometer input, external feedback,  
or Pulse Width Modulation (PWM)

#### Alarm Relay

Form C relay output

#### 2 x 16 Bit Analog Retransmits

Standard setpoint ranges: 0 - 5 Vdc, 4 - 20 mA  
Field scalable 0 - 10 Vdc, 0 - 20 mA, or potentiometer

#### Current Limit, Power Limit, Voltage Limit

#### Remote Display

2 line, 16 character text display with 5 buttons

#### High Performance

True RMS power, load voltage feedback, load current  
feedback, high resolution control loop. Increased accuracy  
and linearity.

#### Isolated I/O

500 Vac isolation from 24 Vdc control power to  
Analog Inputs. General purpose input, Run/Stop, and  
Retransmits.

#### External, Touchsafe Class T Fusing

### DESCRIPTION

MicroFUSION is an ultra-compact high-performance microprocessor-based power controller, available in single phase, three phase 4 SCR, or three phase 6 SCR models to control AC loads.

Resistive or transformer-connected loads can be controlled in either Phase Angle, Zero Cross, or Zero Cross Transformer (ZCT) Mode. Output is controlled linearly with respect to command signal and can be set to the average or RMS value of the voltage and current, as well as true instantaneous power or external feedback.

MicroFUSION Series power controllers are available in current ratings from 8 - 400 Amps AC. Auto-ranging voltage circuitry enables main supply voltage from 24 - 600 Vac for UL/cUL or 24 - 690 Vac for CE, (45 - 65 Hz) eliminating the need for hardware jumpers or stocking multiple controllers for international voltages. A separate 24 Vdc power source supplies the control electronics and maintains critical communications to your control system when the mains are absent.

## DESCRIPTION, CONTINUED

Status LEDs and a LED bar graph make operation and troubleshooting simple. A plug-n-play USB interface and free Control Panel software for your PC further simplifies installing and configuring the controller to your application. For example, controller settings can be duplicated by simply loading a configuration file saved from a previous unit.

Setpoints can be controlled through the standard analog or optional digital fieldbus interface. The factory-configured analog setpoint signal ranges are 0 - 5 Vdc and 4 - 20 mA, both of which are field scalable from 0 - 10 Vdc or 0 - 20 mA.

The fieldbus interface options include EtherNet/IP, EtherCAT, PROFINET, PROFIBUS, Modbus RTU (RS-485), or Modbus TCP. These can be used to communicate with a PLC or factory control system. PROFINET, Modbus TCP, and EtherNet/IP are also available as internal fieldbus options. All interfaces are also available through an external module. A single external Connect Module can also control up to ten zones, reducing system installation costs.

The robust design of MicroFUSION allows for continuous full-frame current operation, without derating, up to 122°C / 6000 ft [50°C / 1829m] altitude. Cooling is accomplished through natural convection, forced air, optional external panel mount, or optional liquid-cooled chill plate.


The optional Remote Display provides a clear readout of key parameters and alarm status. Setpoints, limits and alarms are touchpad accessible and easily customized. For additional convenience, a panel mounting kit is available, eliminating the need for external meters, indicators, switches and the associated costs of wiring and labor.

## DIMENSIONS


Dimensions in Inches [mm]. MicroFUSION can be DIN rail mounted (up to 80 A) or panel mounted.

### 8 - 80 A


#### DIN Rail / Panel Mount

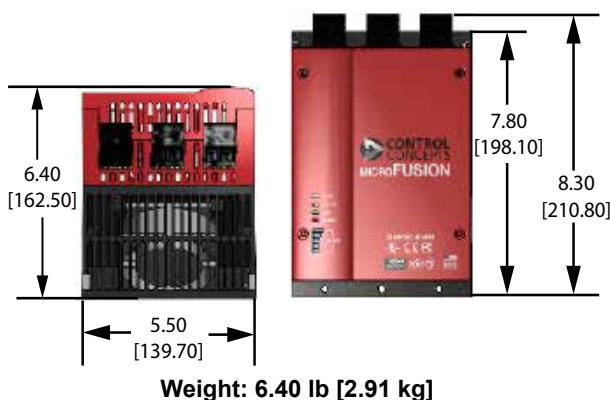


#### Liquid - Cooled

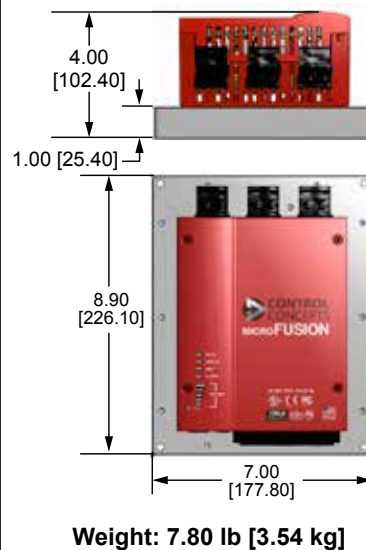

#### External Mount

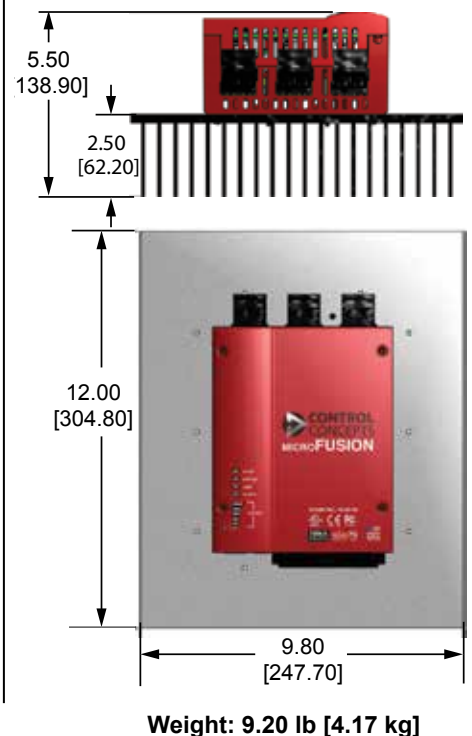


## 100 - 160 A

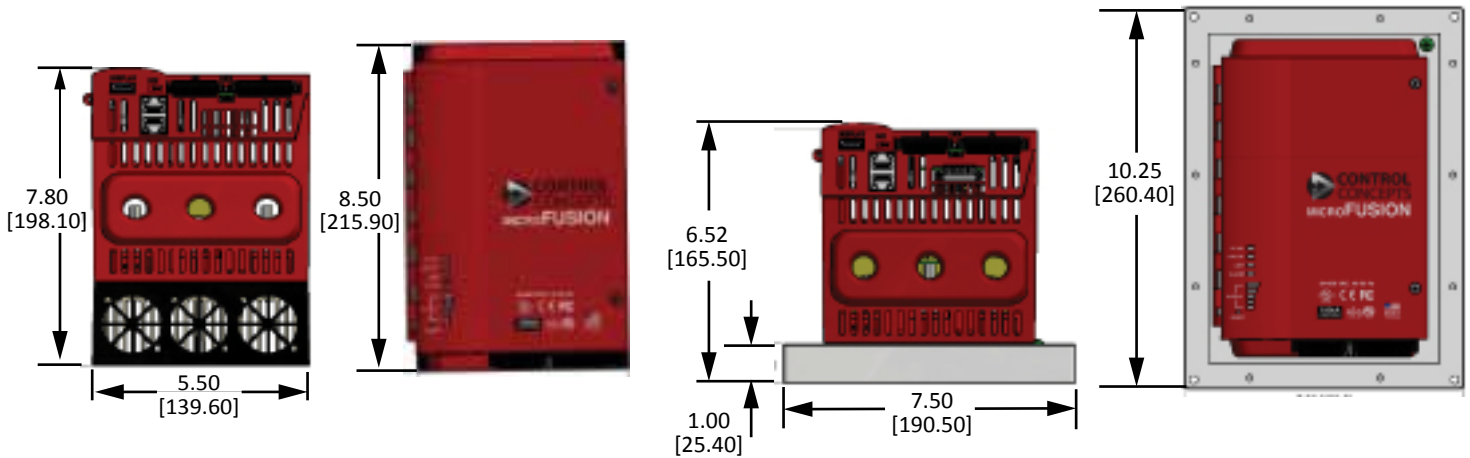

Weight: Fan Cooled 11.6 lb [5.26 kg] , Liquid Cooled 14.8 lb [6.71 kg]


## 200 - 400 A

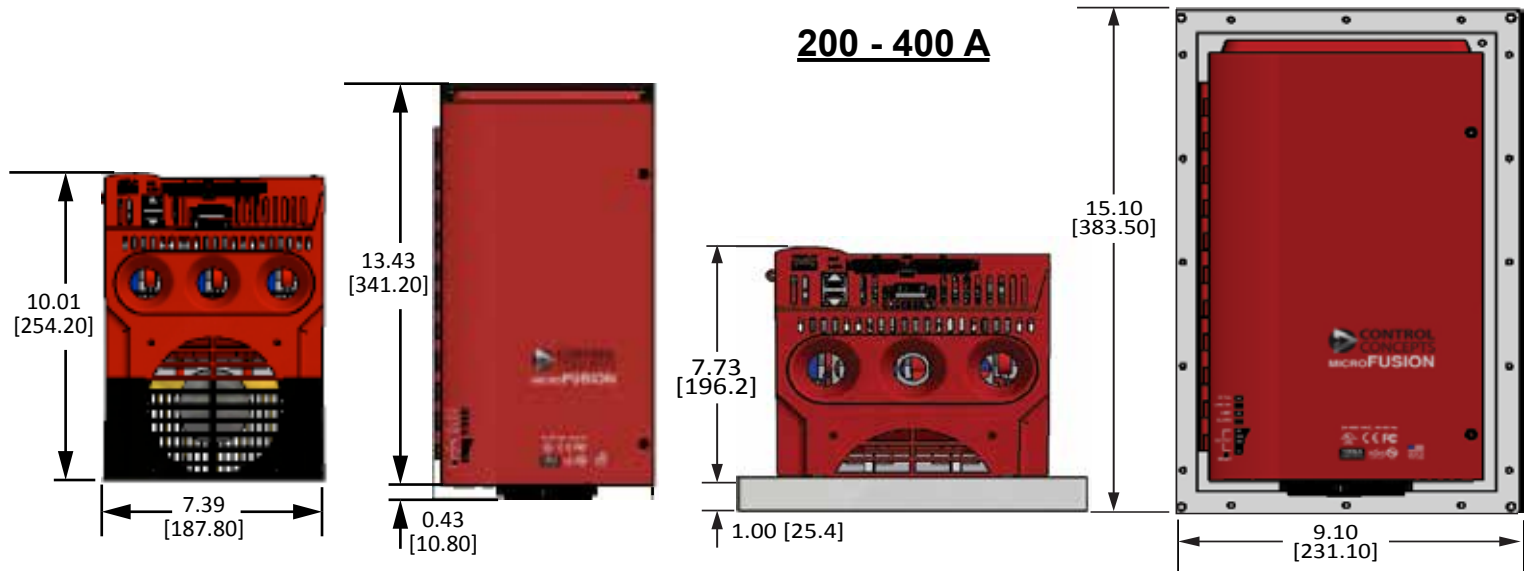

200 - 240A Weight: Fan Cooled 18.00 lb [8.16 kg], Liquid Cooled: 23.50 lb [10.66 kg]  
320 - 400A Weight: Fan Cooled: 19.40 lb [8.80 kg], Liquid Cooled: 25 lb [11.34 kg]


## P1/P2 CONNECTOR

### P1 Connector

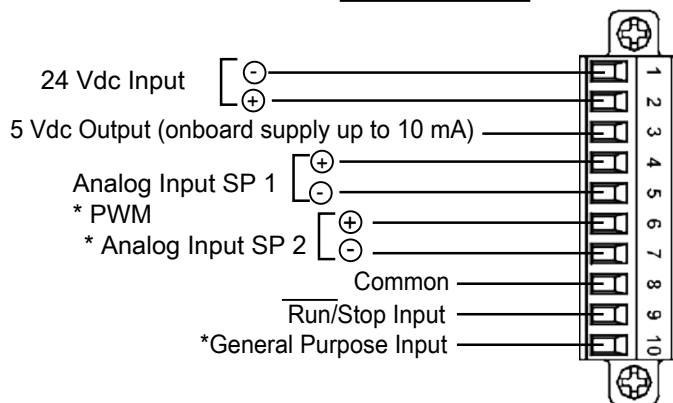


\* Optional

### P2 Connector

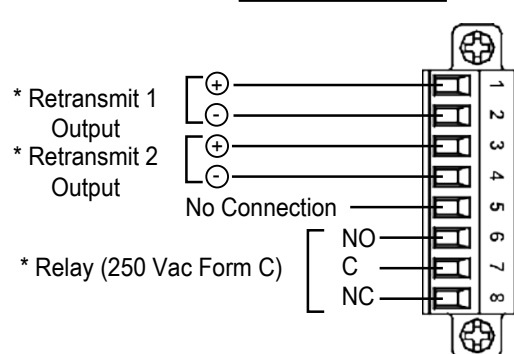


## THREE PHASE LINE/LOAD CONNECTIONS

### Three Phase, 2 Leg, 8 - 80 A

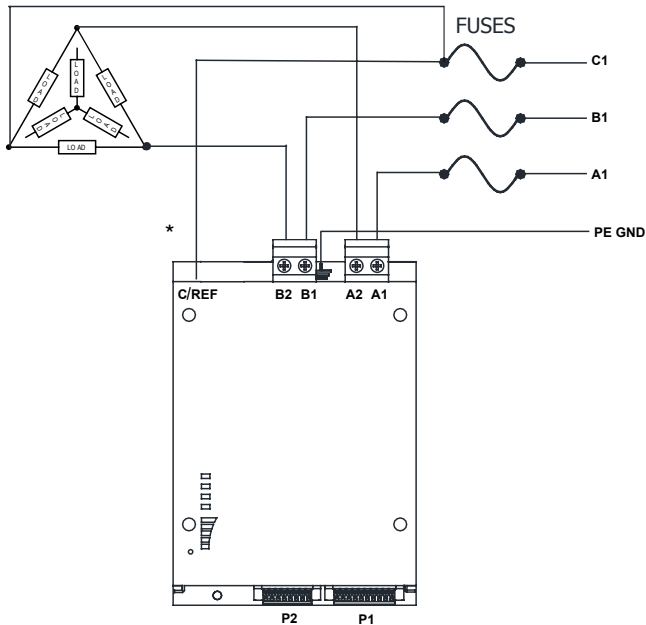


\* Note: 0.60 mA maximum through C Ref connection at 600 Vac.

### Three Phase, Delta or Wye, 8 - 80 A

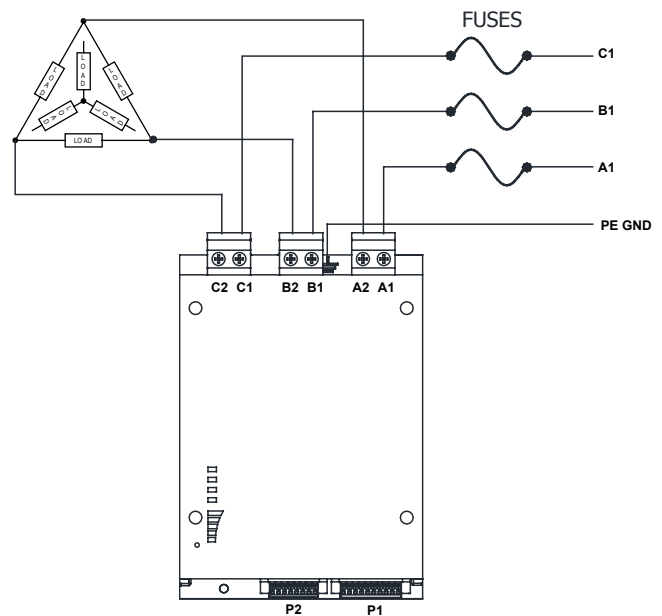


### Three Phase, Four Wire Wye, 8-80 A

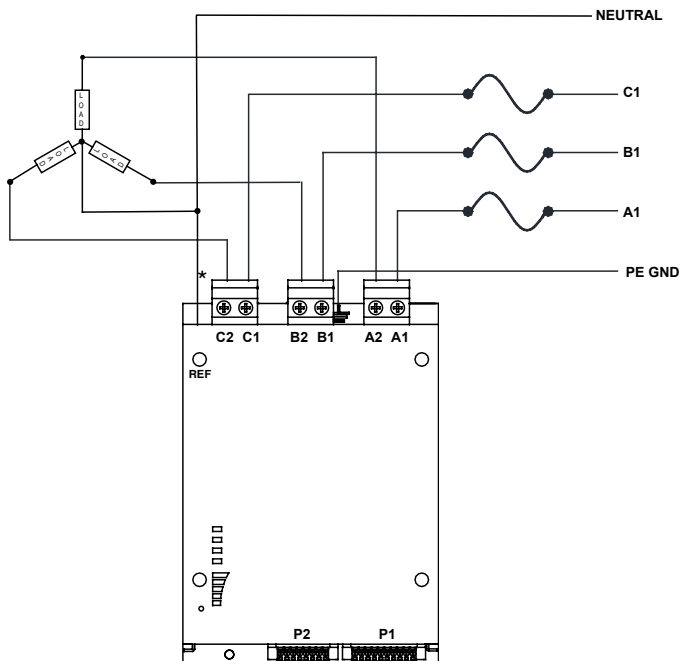

\* Note: 0.60 mA maximum through Ref connection at 600 Vac.

### Three Phase, Delta or Wye, 100 - 160 A

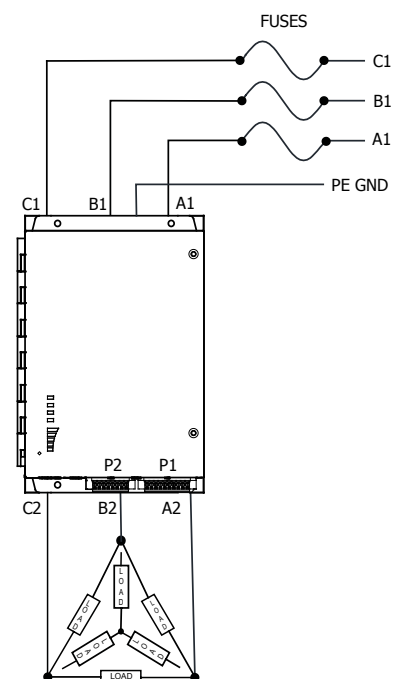


See manual for recommended wire sizes.




## THREE PHASE LINE/LOAD CONNECTIONS


Three Phase, Four Wire Wye, 100 - 160 A

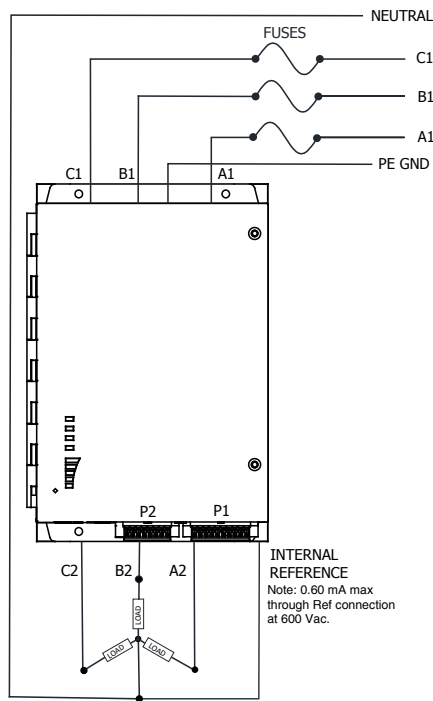


Three Phase, Inside Delta, 100 - 160 A

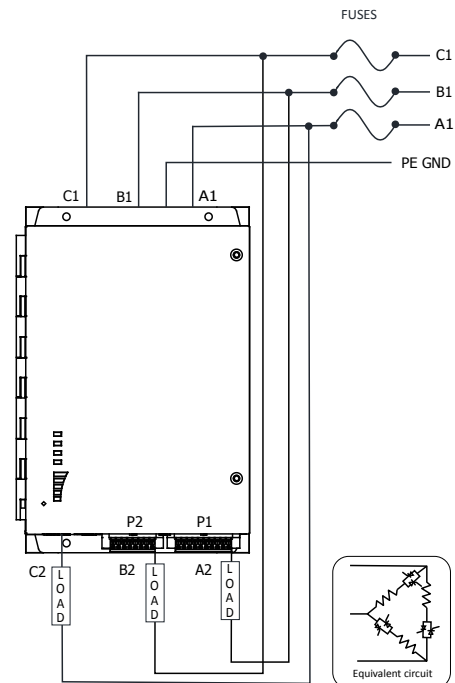

Three Phase, Delta Wye, 200 - 400 A

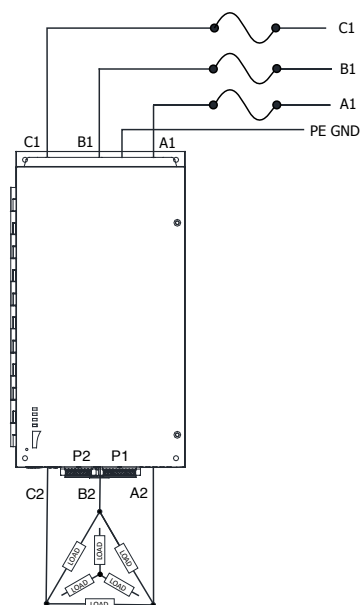


Three Phase, Inside Delta, 200 - 400 A

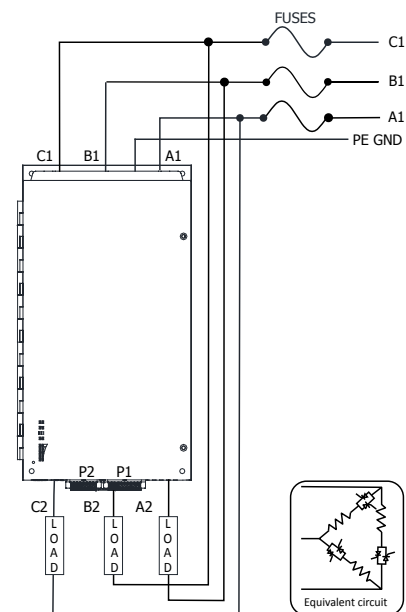

See manual for recommended wire sizes.

## THREE PHASE LINE/LOAD CONNECTIONS, CONTINUED

### Three Phase, 4 Wire Wye, 200 - 400 A

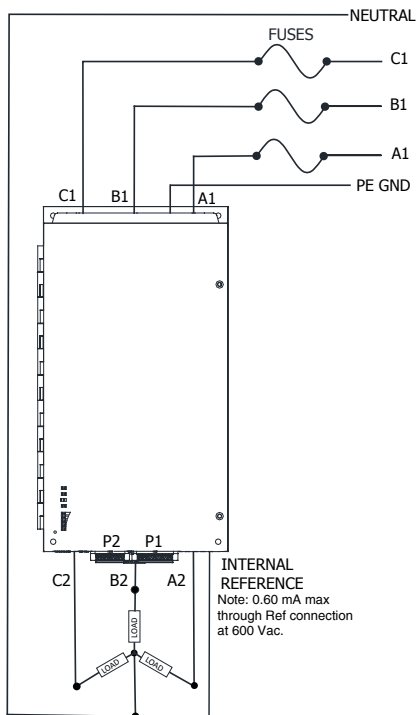

See manual for recommended wire sizes.

## FEATURE COMPARISON

MicroFUSION is available with one of four performance options: SX-S (Standard board), SX-L (Standard board with Current features), HX-L (High Performance board with Current and Voltage features) and HX-P (Fully populated High Performance board)

● = Included

□ = Option Available at Manufacturing Time

○ = Field Upgradable Option

- = Not available

FEATURE LIST	SX-S	SX-L	HX-L	HX-P
Auto-Ranging Input: 24 - 600 Vac for UL/cUL, 690 Vac for CE	●	●	●	●
Phase Angle <sup>1</sup> and Zero Cross Firing Modes	●	●	●	●
Adjustable Phase Angle Soft-Start <sup>1</sup>	●	●	●	●
Heater Bake Out	●	●	●	●
Touchsafe Design	●	●	●	●
UL Listed, CE, 100kA SCCR, and RoHS certifications	●	●	●	●
Micro USB Connection (USB Plug-N-Play)	●	●	●	●
Free Control Panel Software	●	●	●	●
DIN Rail Mountable (Up to 80A)	●	●	●	●
Panel Mount	●	●	●	●
Run/Stop	●	●	●	●
Overcurrent Trip	●	●	●	●
Analog Input (0 - 10 Vdc, 0/4 - 20 mA or potentiometer)	●	●	●	●
CCI Link™ Connectivity	●	●	●	●
TRANS-GUARD™ - Prevent upstream transformer heating	●	●	●	●
LED Bar Graph	●	●	●	●
Fixed Current Limit - 105% of Frame	●	-	-	-
Adjustable Current Limit	○	●	●	●
Alarm Relay	○	○	●	●
Current Control	○	●	●	●
Load Voltage Control	-	-	●	●
Voltage Limit	-	-	●	●
Monitor Load Current - Provides load current data via software, display, or fieldbus	○	●	●	●
Isolated I/O	□	□	□	□
2 Analog Input Channel (0 - 10 Vdc, 0/4 - 20 mA or potentiometer)	○	○	○	○
General Purpose Input	○	○	○	○
Pulse Width Modulation Input (PWM)	○	○	○	○
Accessory Option: Remote Display	○	○	○	○
SYNC-GUARD™ Connectivity - Power level multiple Zero-Cross controllers	○	○	○	○
External Fieldbus Options: Modbus TCP, Modbus RTU, EtherNet/IP, PROFINET, PROFIBUS, EtherCat	○	○	○	○
Internal Fieldbus Options: PROFINET, Modbus TCP, and EtherNet/IP	□	□	□	□
External Panel Mount Heatsink (Up to 50 A)	□	□	□	□

<sup>1</sup> Except for 4DY models

FEATURE COMPARISON LIST, continues on next page

## FEATURE COMPARISON, CONTINUED

FEATURE LIST, CONTINUED	SX-S	SX-L	HX-L	HX-P
Water Cooled Heatsink	□	□	□	□
Zero Cross Transformer Firing Mode	-	-	○	○
Retransmit (RTX): 2x High Resolution Analog Outputs 0 -10 Vdc or 0/4-20 mA	-	-	○	○
Power Limit	-	-	○	●
True Power Control	-	-	○	●
Monitor True RMS Power - Provides true power data via software, display, or fieldbus	-	-	○	●
High Resolution Control Loop	-	-	○	●
Kwh Meter	-	-	○	●
HiPer Mode - High performance low conduction angle firing mode	-	-	○	●
Resistance Measurement	-	-	○	●

## SPECIFICATIONS

POWER	
Line Voltage (Auto Ranging)	UL/cUL: 24 - 600 Vac (Nominal) +10% / -15% (Contact CCI for other options) CE: 24 - 690 Vac (Nominal) +10% / -15% (Contact CCI for other options)
Line Frequency (Auto Ranging)	45 - 65 Hz
Frame Current Ratings (Amps)	Continuous RMS (AC) 8   16   32   50   80   100   130   160   200   240   320   400
Current Rating - Peak Surge	20X frame rating for 10 ms
Minimum Hold/Latch Current	500 mA up to 160 A      1 A at 200 - 400 A
Max Leakage Current	10.6 mA @ 600 VAC 50/60 Hz
SCR Rating (PIV)	1600 V peak forward & reverse
Fusing	Optional external Class T, branch-rated, touch-safe fusing
Thermal	Integrated heat sink thermal sensor
Current Limit	105% (SX-S), 20 - 105% (SX-L, HX) of continuous rating of Frame Amp Rating
Current Trip	50 - 450% of continuous rating
Power Dissipation	1.3 Watt per A of load current per phase
Control Power / Operates Internal Control Electronics	24 Vdc +10 / -15% (See Page 8 for DC power consumption)
Utilization Categories	See manual for ratings

ENVIRONMENTAL	
Surrounding Air Operating Temp	32°F to 122°F [0°C to 50°C] with derating for 140°F [60°C]
Humidity	20 to 90% RH Non-Condensing
Rated Operating Altitude	Up to 6000 ft [1829 m] at full rated current
Contaminates	RoHS Compliant, CE Pollution Degree 2
Storage Temperature	- 4°F to 176°F [-20°C to 80°C]

**NOTE:** Refer to the Operators Manual for EMC and other pertinent information.




## SPECIFICATIONS, CONTINUED

### RELIABILITY

Mean Time Between Failure (MTBF)	100,000 Hours at 25°C
----------------------------------	-----------------------

### TEMPERATURE DERATING

Surrounding Air Temperature effect on the Controller
--

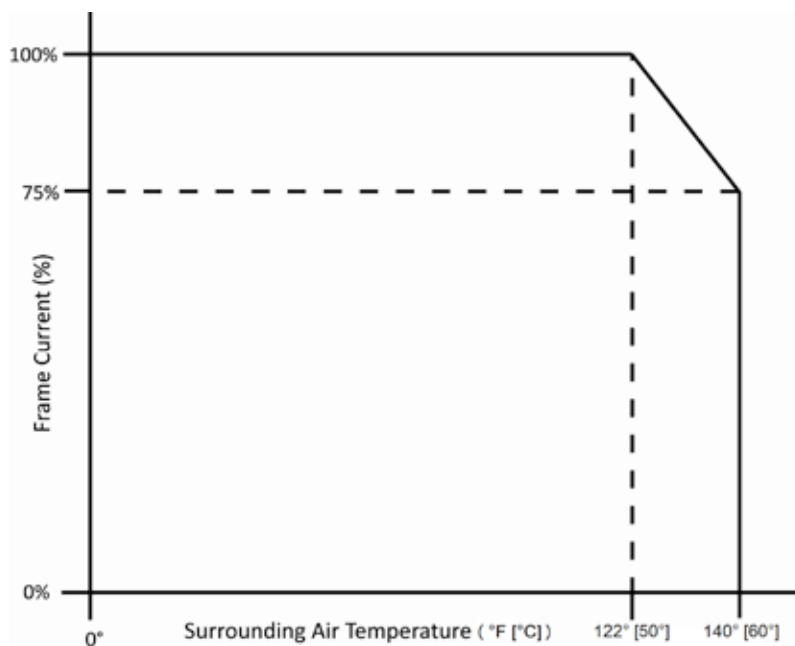

### PERFORMANCE

	Standard	High Performance Option
Setpoint Resolution	10k	10k or 64k
Internal Control Loop Resolution	16k	64k
Output Resolution	12k @ 50Hz, 10k @ 60Hz	50k @ 50Hz, 42k @ 60Hz
Response Time	Adjustable from 50 msec to 2 sec	Adjustable from 50 msec to 2 sec
Accuracy (Full Conduction)		
Voltage	3% of frame rating	0.5% of frame rating
Current	3% of frame rating	0.5% of frame rating
Power	6% of frame rating	1% of frame rating
Output Linearity	4% from 5 to 100% output range	1% from 5 to 100% output range
Accuracy	+10% to -15% line voltage change will result in a max output change of 0.5% from 5 to 100% output range	+10% to -15% line voltage change will result in a max output change of 0.05% from 5 to 100% output range
Temperature Drift	Output shall not change greater than 0.5% per degree C max over the operating temperature range from 5 to 100% output range	Output shall not change greater than 0.2% per degree C max over the operating temperature range from 5 to 100% output range

## SPECIFICATIONS, CONTINUED

COOLING		
Din Rail/Panel Mount	Forced Air / Natural Convection	
External Panel Mount	Natural Convection	
Liquid Cooled	Flow rate: 1 GPM [3.79 LPM] minimum Maximum inlet temperature: 122° F [50° C] Maximum pressure: 60 PSI [4.137 Bar] Up to 50% glycol water solution Pressure Drop: 2.60 PSI at 1 GPM Particulate filtered water containing less than:	
	Mineral	Recommended Limit
	Calcium	< 50 PPM
	Magnesium	< 50 PPM
	Total Hardness	< 100 PPM (5 Grains)
	Chloride	< 25 PPM
	Sulfate	< 25 PPM
	A corrosive inhibitor must be used for deionized or demineralized water PH must be between 4 and 9.	

DC POWER CONSUMPTION	
8 - 160 Amp Three Phase	24 Watts
200 - 400 Amp Three Phase	33 Watts
Onboard Fieldbus Module	Add 0.7 Watts
CCI Connect Module	Add 6 Watts for each Connect Module in the system, not per controller

ENCLOSURE PROTECTIVE RATING	
International	IP 20
Remote Display	IP 65, UL Type 1 & 12
External Panel Mount	IP 65, UL Type 4
Liquid Cooled	IP 65, UL Type 4

I <sup>2</sup> t DATA (8.3 - 10 msec)		
Frame Size	Conditions	I <sup>2</sup> t Data
0 - 80	Junction Temp 125°C	16200 A <sup>2</sup> s
100 - 160	Junction Temp 125°C	80000 A <sup>2</sup> s
200 - 240	Junction Temp 125°C	125000 A <sup>2</sup> s
320 - 400	Junction Temp 125°C	320000 A <sup>2</sup> s

ISOLATION	
Signal to Line/Load	4000 Vac minimum
Line/Load to Ground	2500 Vac minimum
Signal to Ground	2000 Vac minimum
Line to Load	1400 Vac minimum
Network	1500 Vac minimum
USB	2500 Vac minimum
Signal to Processor	1500 Vac minimum
Remote Display	2500 Vac minimum

SCCR - TYPE 1 COORDINATION		
Frame 1Ø / 3Ø	Required Fusing *	SCCR Rating
8 Amp	10A Fast Acting J or T	100 kA
16 Amp	20A Fast Acting J or T	100 kA
32 Amp	40A Fast Acting J or T	100 kA
50 Amp	60A Fast Acting J or T	100 kA
80 Amp	100A Fast Acting J or T	100 kA
100 Amp	125A Fast Acting J or T	100 kA
130 Amp	175A Fast Acting J or T	100 kA
160 Amp	200A Fast Acting J or T	100 kA
200 Amp	250A Fast Acting J or T	100 kA
240 Amp	300A Fast Acting J or T	100 kA
320 Amp	400A Fast Acting J or T	100 kA
400 Amp	500A Fast Acting J or T	100 kA

\* Maximum fuse Ampere shown above, fuses with lower Ampere rating can also be used.

ANALOG SETPOINT INPUTS		
Voltage	0 - 10 Vdc 0 to 65535	Update period: 6 ms
Voltage Impedance	200 kOhm	
Max Voltage	+/- 15 Vdc	
Current Mode	0 - 20 mA 0 to 32767	
Current Impedance	249 Ohm	
Max Current	+/- 31 mA or +/- 7.8 Vdc	
Pulse Width-Modulation	0 - 100% Frequency range: 20 Hz to 2 kHz max	

uF3 □□□□- □ □□□□□ □

## 21

# MICROFUSION

## MULTIZONE SYSTEMS

### EXTERNAL PANEL MOUNT / LIQUID COOLED

- Multizone system
- Up to 10 MicroFUSION units
- External panel mount or liquid-cooled heatsink
- Reduces enclosure size
- Reduces air conditioning requirements by moving heat outside the enclosure
- UL, cUL, CE, RoHS, and 100kA SCCR certifications
- IP65, UL Type 4



MicroFUSION is an ultra-compact high-performance microprocessor-based power controller, available in single or three phase models to control AC loads.

Resistive or transformer-connected loads can be controlled in either Phase Angle, Zero Cross, or Zero Cross Transformer (ZCT) Mode. Output is controlled linearly with respect to command signal and can be set to the average or RMS value of the voltage and current, as well as true instantaneous power or external feedback.

MicroFUSION Series power controllers are available in current ratings from 8, 16, 32, 50, 80, 100, 130, 160, 200, 240, 320, 400 Amps AC. Auto-ranging voltage circuitry enables mains supply voltage from 24-600 VAC (UL), 24-690 VAC (CE), or 45-65 Hz, eliminating the need for hardware jumpers or stocking multiple controllers for international voltages. A separate power source supplies the control electronics and maintains critical communications to your control system when the mains are absent.





# SPECIFICATIONS

## PERFORMANCE

	Standard	High Performance Option
Setpoint Resolution	10,000 counts	Selectable 10,000 or 64,000 counts
Internal Control Loop Resolution	16,000 counts	64,000 counts
Output Resolution	12,000 counts @ 50Hz, 10,000 counts @ 60Hz	50,000 counts @ 50Hz, 42,000 counts @ 60Hz
Accuracy (Full Conduction)		
Voltage	3% of span	0.5% of span
Current	3% of span	0.5% of span
Power	3% of span	1% of span
Output Linearity	4% from 5 to 100% output range	1% from 5 to 100% output range
Accuracy	A +10% to -15% line voltage change will result in a max output change of 0.5% from 5 to 100% output range	A +10% to -15% line voltage change will result in a max output change of 0.05% from 5 to 100% output range
Temperature Drift	Output shall not change greater than 0.5% per degree C max over the operating temperature range from 5 to 100% output range	Output shall not change greater than 0.2% per degree C max over the operating temperature range from 5 to 100% output range

## POWER

Line Voltage (Auto Ranging)	UL/cUL: 24 - 600 VAC (Nominal) +10% / -15% (Contact CCI for other options) CE: 24 - 690 VAC (Nominal) +10% / -15% (Contact CCI for other options)
Line Frequency (Auto Ranging)	45 - 65 Hz
Current Rating- Peak Surge	20X frame rating for 10 ms
Minimum Hold/Latch Current	500 mA up to 160A      1A at 200-400A
SCR Rating (PIV)	1600 V peak forward & reverse
Fusing	Optional external Class T, branch-rated, touch-safe fusing
Thermal	Integrated heat sink thermal sensor
Current Limit	20% – 105% of continuous rating of Frame Amp Rating
Current Trip	50% - 450% of continuous rating
Power Dissipation	1.3 Watt per amp of load current per phase
Control Power/Operates Internal Control Electronics	24 Vdc +10 / -15%

## ENVIRONMENTAL

Surrounding Air Operating Temperature - External Panel Mount	32°F [0°C] - 122°F [50°C] with no derating
Surrounding Air Operating Temperature - Liquid Cooled	32°F [0°C] - 140°F [60°C] with no derating
Humidity	20% to 90% RH Non-Condensing
Rated Operating Altitude	Up to 6000 ft [182950m] at full rated current
Contaminates	ROHS Compliant, CE Pollution Degree 2
Storage Temperature	- 4 to 176°F [- 20 to 80°C]

## DC POWER CONSUMPTION (AT 24 VDC)

16 - 160A Single Phase	7 Watts per controller
200 - 240A Single Phase	11 Watts
320 - 400A Single Phase	17 Watts
Onboard Fieldbus Module	Add 0.7 Watts
CCI Connect Module	Add 6 Watts per Connect Module in the system, <b>NOT</b> per controller

## COOLING

External Panel Mount	Natural Convection																		
Liquid Cooled	<p>Flow rate: 1 GPM [3.79 LPM] minimum Maximum inlet temperature: 122° F [50° C] Maximum pressure: 60 PSI [4.137 Bar] Up to 50% glycol water solution</p> <p>Pressure Drop</p> <table> <tr> <td>3 Zone</td><td>2.64 PSI at 1 GPM</td></tr> <tr> <td>6 zone</td><td>2.9 PSI at 1 GPM</td></tr> <tr> <td>10 zone</td><td>3.35 PSI at 1 GPM</td></tr> </table> <p>Particulate filtered water containing less than:</p> <table> <tr> <th>Mineral</th><th>Recommended Limit</th></tr> <tr> <td>Calcium</td><td>&lt; 50 PPM</td></tr> <tr> <td>Magnesium</td><td>&lt; 50 PPM</td></tr> <tr> <td>Total Hardness</td><td>&lt; 100 PPM (5 Grains)</td></tr> <tr> <td>Chloride</td><td>&lt; 25 PPM</td></tr> <tr> <td>Sulfate</td><td>&lt; 25 PPM</td></tr> </table> <p>A corrosive inhibitor must be used for deionized or demineralized water PH must be between 4 and 9.</p>	3 Zone	2.64 PSI at 1 GPM	6 zone	2.9 PSI at 1 GPM	10 zone	3.35 PSI at 1 GPM	Mineral	Recommended Limit	Calcium	< 50 PPM	Magnesium	< 50 PPM	Total Hardness	< 100 PPM (5 Grains)	Chloride	< 25 PPM	Sulfate	< 25 PPM
3 Zone	2.64 PSI at 1 GPM																		
6 zone	2.9 PSI at 1 GPM																		
10 zone	3.35 PSI at 1 GPM																		
Mineral	Recommended Limit																		
Calcium	< 50 PPM																		
Magnesium	< 50 PPM																		
Total Hardness	< 100 PPM (5 Grains)																		
Chloride	< 25 PPM																		
Sulfate	< 25 PPM																		

## ENCLOSURE PROTECTIVE RATING

International	IP 20
Remote Display	IP 65, UL Type 1 & 12
External Panel Mount	IP 65, UL Type 4
Liquid Cooled	IP 65, UL Type 4

## ISOLATION

Signal to Line/Load	4000 Vac minimum
Line/Load to Ground	2500 Vac minimum
Signal to Ground	2000 Vac minimum
Line to Load	1400 Vac minimum
Network	1500 Vac minimum
USB	2500 Vac minimum
Signal to Processor	1500 Vac minimum
Remote Display	2500 Vac minimum

All controllers have 100kA when using less than or equal to 100 Amp class J or T. Installed in enclosure with two latches, 150% of controller size.

Control Concepts recommends sizing fuses approximately 125% frame rating.

## RELIABILITY

Mean Time Between Failure (MTBF)	100,000 Hours at 25°C
----------------------------------	-----------------------

## I<sup>2</sup>t DATA (8.3 - 10 msec)

Frame Size	Conditions	I <sup>2</sup> t Data
0 - 80	Junction Temp 125°C	16200 A <sup>2</sup> s
100 - 160	Junction Temp 125°C	80000 A <sup>2</sup> s
200 - 240	Junction Temp 125°C	125000 A <sup>2</sup> s
320 - 400	Junction Temp 125°C	320000 A <sup>2</sup> s

## SCCR - TYPE 1 COORDINATION

Frame 1Ø / 3Ø	Required Fusing *	SCCR Rating
8 Amp	10A Fast Acting J or T	100 kA
16 Amp	20A Fast Acting J or T	100 kA
32 Amp	40A Fast Acting J or T	100 kA
50 Amp	60A Fast Acting J or T	100 kA
80 Amp	100A Fast Acting J or T	100 kA
100 Amp	125A Fast Acting J or T	100 kA
130 Amp	175A Fast Acting J or T	100 kA
160 Amp	200A Fast Acting J or T	100 kA
200 Amp	250A Fast Acting J or T	100 kA
240 Amp	300A Fast Acting J or T	100 kA
320 Amp	400A Fast Acting J or T	100 kA
400 Amp	500A Fast Acting J or T	100 kA

\* Maximum fuse Ampere shown above, fuses with lower Ampere rating can also be used.

## ANALOG SETPOINT INPUTS


Voltage	0 - 10 Vdc 0 to 65535	Update period: 6 ms
Voltage Impedance	200 kOhm	
Max Voltage	+/- 15 Vdc	
Current Mode	0 - 20 mA 0 to 32767	
Current Impedance	249 Ohm	
Max Current	+/- 31 mA or +/- 7.8 Vdc	
Pulse Width-Modulation	0 - 100% Frequency range: 20 Hz to 2 kHz max	

## DIMENSIONS

Dimensions:  
Inches [mm]

### EXTERNAL PANEL MOUNT


#### Single Phase - 6 Zone

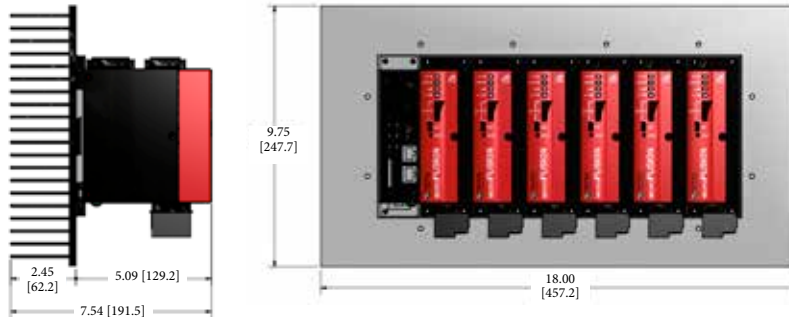

NOTE: controllers are pictured with an optional Connect fieldbus interface.

Zone 1 is considered the controller closest to the Connect module.


#### Single Phase - 10 Zone

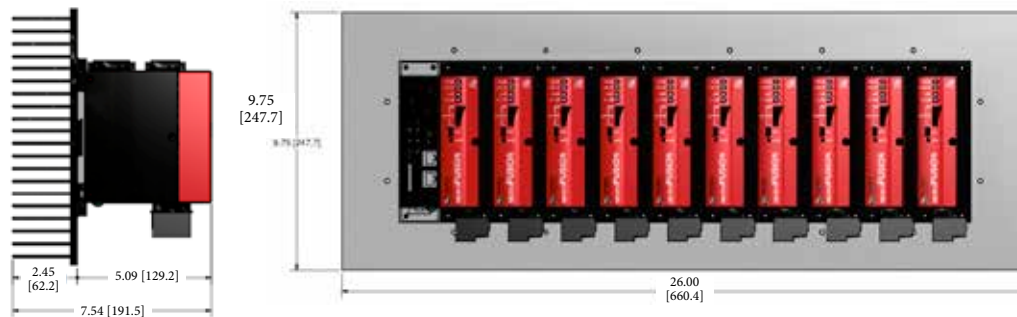


### LIQUID COOLED

NOTE: controllers are pictured with an optional Connect fieldbus interface. Zone 1 is considered the controller closest to the Connect module.


#### Single Phase - 3 Zone (80A)

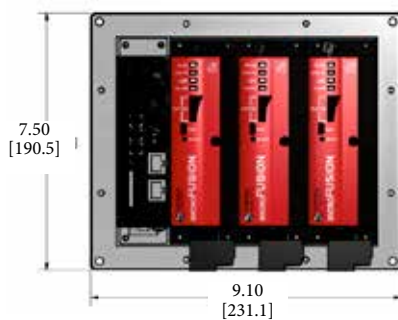

#### Single Phase - 6 Zone (80A)

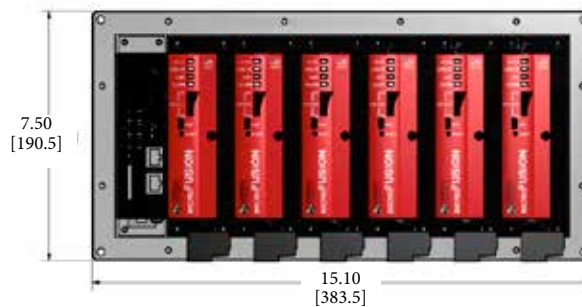


#### Single Phase - 10 Zone (80A)

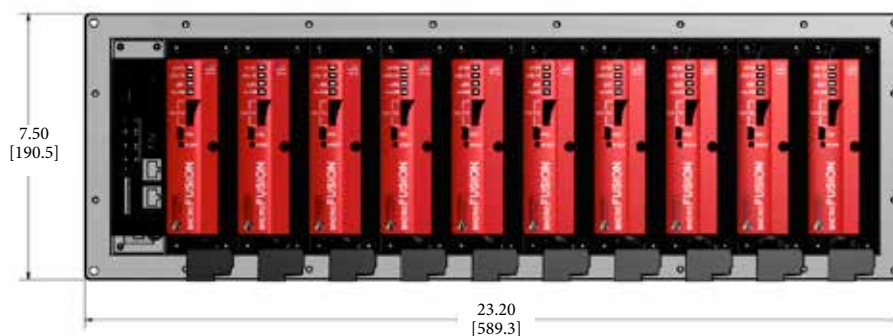


## DIMENSIONS, CONTINUED

Dimensions:  
Inches [mm]


**Single Phase - 3 Zone (160A)**

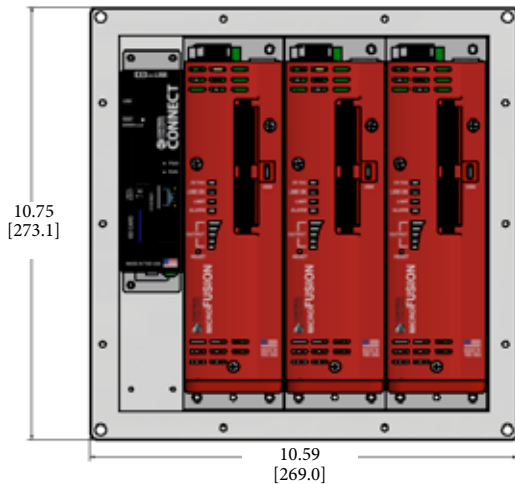

**Single Phase - 6 Zone (160A)**

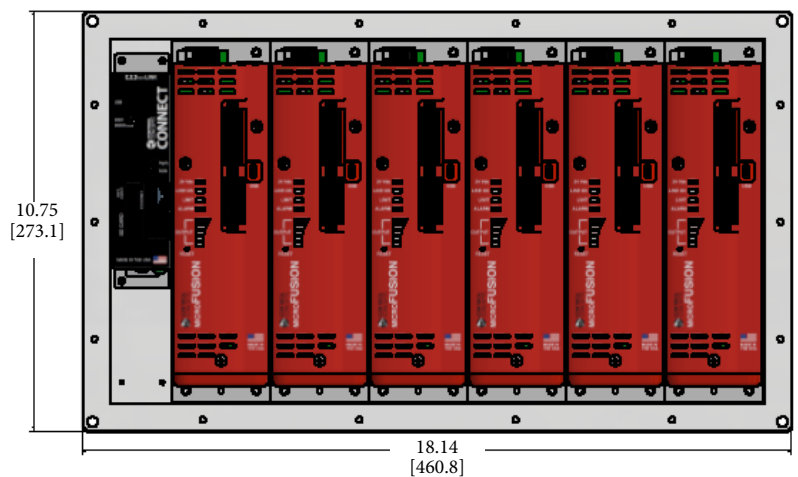

**Single Phase  
3 Zone (400A)**

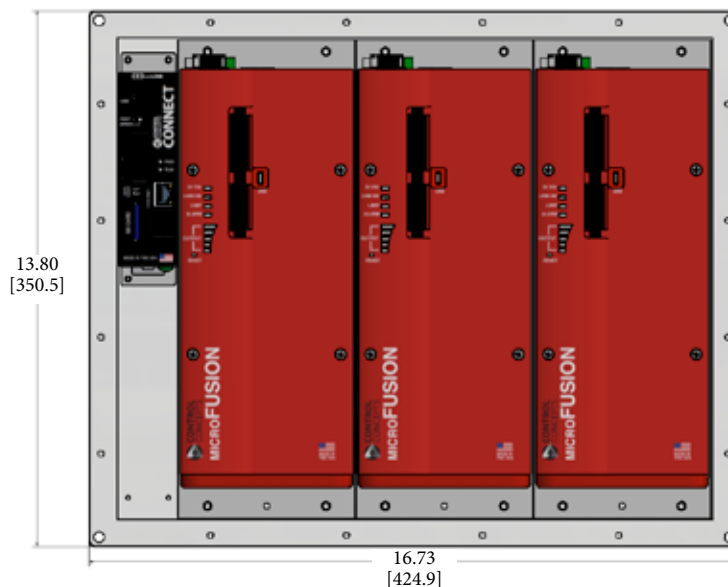


### Layout for water inlet position


Use the following diagrams to determine the Water Inlet Position in the system model number.

Note: The position of the fieldbus module changes per option.

**Option L**

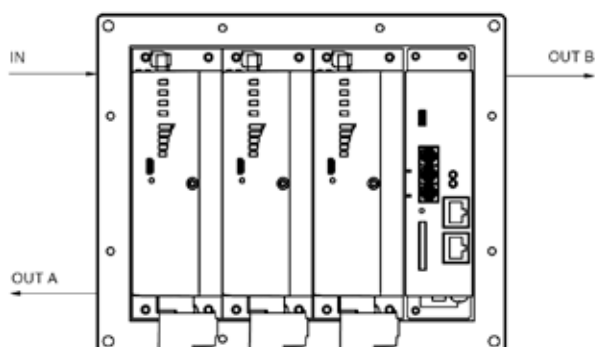

**Option R**

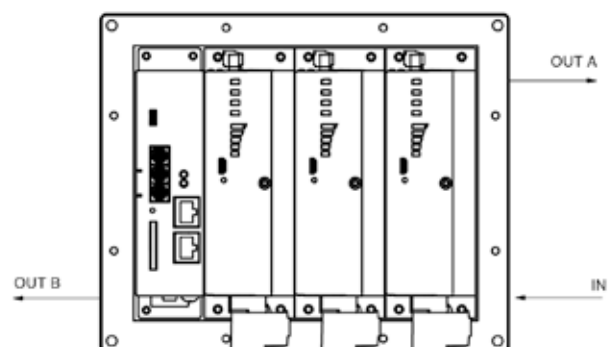



Select heatsink type and number of zones to create a system model number, then create model numbers for each individual unit.

uF1  -  -

<sup>2</sup> Only available with HX type board

## SYSTEM MODEL NUMBER

### Heatsink

EM = External Panel Mount

LC = Liquid-Cooled

### Configuration

See Pages 6-7 to determine the configuration letter.

### Water Inlet Position (Fieldbus Mounts Opposite Side)

L = Left Side

R = Right Side

0 = External Mount

### Unique Identifier

uF

Control Concepts will assign unit a unique 6-digit number

## AMP CONFIGURATION

### LIQUID-COOLED (LC)

Amp Config	Max Zones	Positions										Weight*
		1	2	3	4	5	6	7	8	9	10	
A	3	80A	80A	80A								11.3 [5.13 kg]
B	6	80A	80A	80A	80A	80A	80A					20.6 [9.24 kg]
C	10	80A	80A	80A	80A	80A	80A	80A	80A	80A	80A	33.2 [15.06 kg]
D	3	160A	160A	160A								16.2 [7.34 kg]
E	3	400A	400A	400A								38.4 [17.41 kg]
F	6	160A	160A	160A	160A	160A	160A					30.4 [13.78 kg]

Liquid cooled heatsinks can have up to 80A in each position. Maximum position and ratings listed. Configurations with fewer zones and/or lower current ratings available.

### EXTERNAL PANEL MOUNT (EM)

Amp Configuration	Positions						Weight*
	1	2	3	4	5	6	
A	16A	16A	16A	16A	16A	16A	21.8 [9.89 kg]
B	16A	16A	16A	-	32A	-	18.0 [8.16 kg]
C	32A	-	32A	-	32A	-	16.1 [7.30 kg]
D	16A	16A	-	-	50A	-	16.1 [7.30 kg]
E	-	-	50A	-	50A	-	14.2 [6.44 kg]

\* Add 1 lbs [0.45 kg] when Connect Module is present.

(Dash signifies empty position)

External panel mount heatsinks are limited to specific amp configurations. Maximum position and ratings listed. Configurations with fewer zones and/or lower current ratings available.

## AMP CONFIGURATIONS

### EXTERNAL PANEL MOUNT (EM)

Amp Configuration	Positions / Number of Zones										Weight*
	1	2	3	4	5	6	7	8	9	10	
<b>F</b>	16A	16A	16A	16A	16A	16A	16A	16A	16A	16A	33.8 [15.33 kg]
<b>G</b>	16A	16A	16A	16A	16A	16A	16A	16A	-	32A	31.9 [14.47 kg]
<b>H</b>	16A	16A	16A	16A	16A	16A	-	32A	-	32A	30.0 [13.61 kg]
<b>I</b>	16A	16A	16A	16A	-	32A	-	32A	-	32A	28.1 [12.75 kg]
<b>J</b>	16A	16A	-	32A	-	32A	-	32A	-	32A	26.2 [11.88 kg]
<b>K</b>	-	32A	-	32A	-	32A	-	32A	-	32A	24.3 [11.02 kg]
<b>L</b>	16A	16A	16A	16A	16A	16A	-	-	-	50A	28.1 [12.75 kg]
<b>M</b>	16A	16A	-	-	-	50A	-	-	-	50A	22.4 [10.16 kg]
<b>N</b>	-	32A	-	-	-	50A	-	-	-	50A	20.5 [9.30 kg]
<b>O</b>	-	32A	-	32A	-	32A	-	-	-	50A	22.4 [10.16 kg]
<b>P</b>	16A	16A	16A	16A	-	32A	-	-	-	50A	26.2 [11.88 kg]
<b>Q</b>	16A	16A	-	32A	-	32A	-	-	-	50A	24.3 [11.02 kg]
<b>R</b>	50A	-	-	-	-	50A	-	-	-	50A	20.5 [9.30 kg]

\*Add 1 lbs [0.45 kg] when Connect Module is present.

Notes:1. (-) Dash signifies empty position

2. External panel mount heatsinks are limited to specific amp configurations.

3. Maximum position and ratings listed.

4. Configurations with fewer zones and/or lower current ratings available.

# CONTROL CONCEPTS CONNECT

## GATEWAY MODULE

### DESCRIPTION

Control Concepts' Connect is a fieldbus gateway module that can link up to 10 MicroFUSION units using CCI Link, a dedicated, real-time, deterministic digital bus.

The Connect module reduces per-point cost for digital system connectivity and gives full access to monitor parameters that are only available over a dedicated digital bus.

### FEATURES


- Controls up to 10 Zones
- Protocols:
  - EtherCAT
  - EtherNet/IP
  - Modbus TCP
  - PROFINET (maximum 6 zones)
  - PROFIBUS (maximum 6 zones)
- Data Logger
  - Battery-backed real time clock
  - Removable SD Card
  - Records data in 100 ms to 1 minute intervals
- Micro USB port for easy setup
- Panel mount or Din-Rail mount



10x 80A MicroFUSIONs mounted on a liquid cooled heatsink with 10 node EtherCAT Connect gateway. Maximum power of 480 KW

## DIMENSIONS

Dimensions:  
Inches [mm]

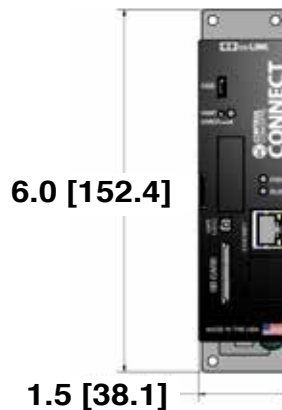

## SPECIFICATIONS

### ENVIRONMENTAL

Power Consumption	200 mA Amps at 24 Vdc - Powered from CCI Link
Surrounding Air Operating Temperature	32°F [0°C] - 122°F [50°C]
Humidity	20% to 90% RH Non-Condensing
Rated Operating Altitude	Up to 6000 ft [1829m]
Contaminates	ROHS Compliant, CE Pollution Degree 2
Storage Temperature	- 4 to 176°F [- 20 to 80°C]
Heatsink Options	Panel Mount or Din Rail Mountable

### SD Card

Capacity	16 GB Included. Maximum compatible storage: 64 GB
Logging Channels	Up to 10 devices
Logging Intervals	100 ms to 1 minute

### DIGITAL BUS PERFORMANCE

Command Latency	≤ 100 ms
Monitor Latency	≤ 100 ms
Update Period	≤ 100 ms

## MODEL NUMBERS

FG -  -  -

### Communication

L = Data Logger Only      I = EtherNet/IP  
E = Modbus TCP              N = PROFINET  
C = EtherCAT  
Consult factory for additional fieldbus interfaces

### Nodes

03 - Communicate with up to three nodes  
06 - Communicate with up to six nodes  
10 - Communicate with up to ten nodes

### Configuration Data

Supplied by Control Concepts. 0000 default if not supplied by CCI.



## ACCESSORIES

### CCI LINK™

MicroFUSION features CCI Link™, a proprietary deterministic digital bus that enables multiple CONTROL CONCEPTS devices to communicate with each other. CCI Link™ is currently used to enable SYNC-GUARD™ over a digital bus.



0.5 ft [0.15m] cable	0058003-0050-005
1 ft [0.3 m] cable	0058003-0050-01
3 ft [0.9m] cable	0058003-0050-03
5 ft [1.5m] cable:	0058003-0050-05
15 ft [4.6m] cable:	0058003-0050-15
25 ft [7.6m] cable:	0058003-0050-25

### FIELD BUS INTERFACE

Modbus RTU (RS-485), Modbus TCP (Ethernet), EtherNet/IP, EtherCAT, PROFINET, or PROFIBUS. Simplify your cabling, eliminate A/D conversion error, and gain access to monitor information. Internal interface option: Modbus TCP, EtherNet/IP, or PROFINET. External interface option: All fieldbus interfaces are available. Controls up to ten zones.



### REMOTE HAND TERMINAL

This handheld display can be plugged into any MicroFUSION or FUSION device to view and change parameters on the display list. Part Number: SMADISPLAY-RTK.

Cables may be purchased to connect the MicroFUSION and FUSION devices.

	MicroFUSION	FUSION
5 ft [1.5m] cable:	0058007-0050-05	0058003-0050-05
15 ft [4.6m] cable:	0058007-0050-15	0058003-0050-15
25 ft [7.6m] cable:	0058007-0050-25	0058003-0050-25



### REMOTE DISPLAY

When the Remote Display is panel mounted it's easy to view and customize limits, setpoints, and alarm conditions via the 2-Line, 16-character text display. UL-type 1 & 12 ratings, IP65

5 ft [1.5m] cable:	SMAUFUSION-RDK5
15 ft [4.6m] cable:	SMAUFUSION-RDK15
25 ft [7.6m] cable:	SMAUFUSION-RDK25



Information furnished by CONTROL CONCEPTS INC. is believed to be accurate and reliable. However, no responsibility is assumed by CONTROL CONCEPTS INC. for its use. CONTROL CONCEPTS INC. Reserves the right to change the design or operation of the equipment described herein and any associated controller products without notice. CONTROL CONCEPTS INC. also assumes no responsibility for any errors that may appear in this document. Information in this document is subject to change without notice.

## ACCESSORIES, CONTINUED

### DIN RAIL POWER SUPPLIES

24 Watt – 0091011-0024-1

60 Watt – 0091011-0060-1

96 Watt – 0091011-0096-1

120 Watt – 0091011-0120-1

### USB CABLE

15 FT [4.92 m], Micro USB cable: 0058006-0000-15

### OTHER ACCESSORIES

Please contact us for fuse sizing and other accessory needs and we will accommodate you.

Information furnished by CONTROL CONCEPTS INC. is believed to be accurate and reliable. However, no responsibility is assumed by CONTROL CONCEPTS INC. for its use. CONTROL CONCEPTS INC. Reserves the right to change the design or operation of the equipment described herein and any associated controller products without notice. CONTROL CONCEPTS INC. also assumes no responsibility for any errors that may appear in this document. Information in this document is subject to change without notice.



## A worldwide presence in more than 51 countries

Algeria	Finland	Japan	Portugal	Taiwan
Australia	France	Latvia	Romania	Thailand
Austria	Germany	Lithuania	Russia	Turkey
Belgium	Greece	Malaysia	Singapore	United Kingdom
Bulgaria	Hong Kong	Mexico	Slovakia	United States
Canada	Hungary	Morocco	Slovenia	Ukraine
China	India	The Netherlands	South Korea	Vietnam
Czech Rep.	Indonesia	New Zealand	South Africa	
Denmark	Ireland	Norway	Spain	
Egypt	Israel	Philippines	Sweden	
Estonia	Italy	Poland	Switzerland	



Sales department for Europe:  
for Asia / Pacific / Africa :  
email: [cci@celduc.com](mailto:cci@celduc.com)

Tel. +33 (0)4 77 53 90 21  
Tel. +33 (0)4 77 53 90 19  
Web: [www.celduc-relais.com](http://www.celduc-relais.com)



Sales department for North & South America:  
email: [info@ccipower.com](mailto:info@ccipower.com)

Tel. +1 952 474 6200 or +1 800 765 2799  
Web: [www.ccipower.com](http://www.ccipower.com)

Your distributor / Your agent